



## Recommended Drop Handle Fitting Guide


Our screw and thread fittings are designed with a standard length, making them compatible with most doors and cupboards. As the thickness of doors, kitchen cupboard doors, wardrobe doors etc all vary we are able to cut spindle to required length for our customers.

When ordering online please fill out the spindle size and door depth option boxes. You can also email or give us these details over the phone.

Alternatively all door spindles, brass and steel threads can be cut down using a hacksaw if your doors are thinner.

Our door knobs and handles are suitable for both internal and external doors. For optimal fit, we recommend using a seven mm spindle with an optional eight mm sleeve.

If needed, we can customize the spindle length to your specified measurements.

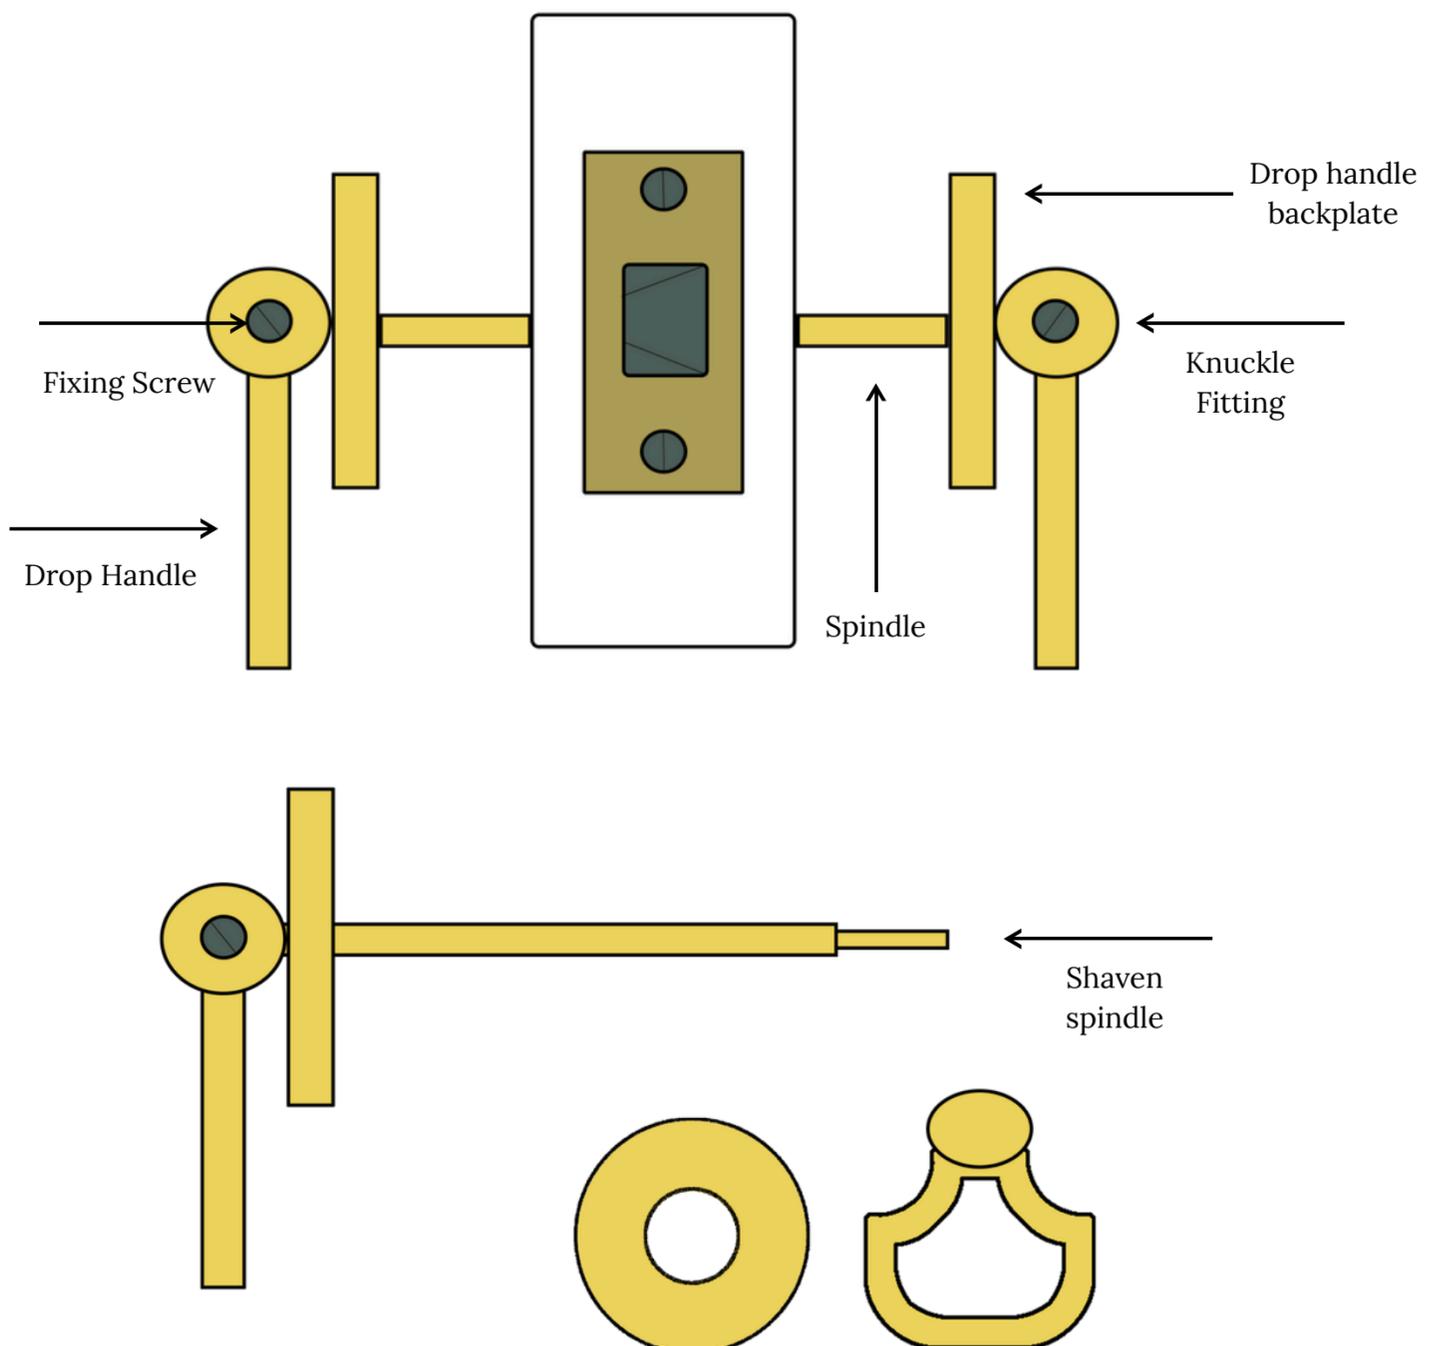


- 1) Unscrew the fixing screw on the loose side and take off the drop handle, backplate and knuckle fixing to expose the shaven spindle.






## Recommended Drop Handle Fitting Guide

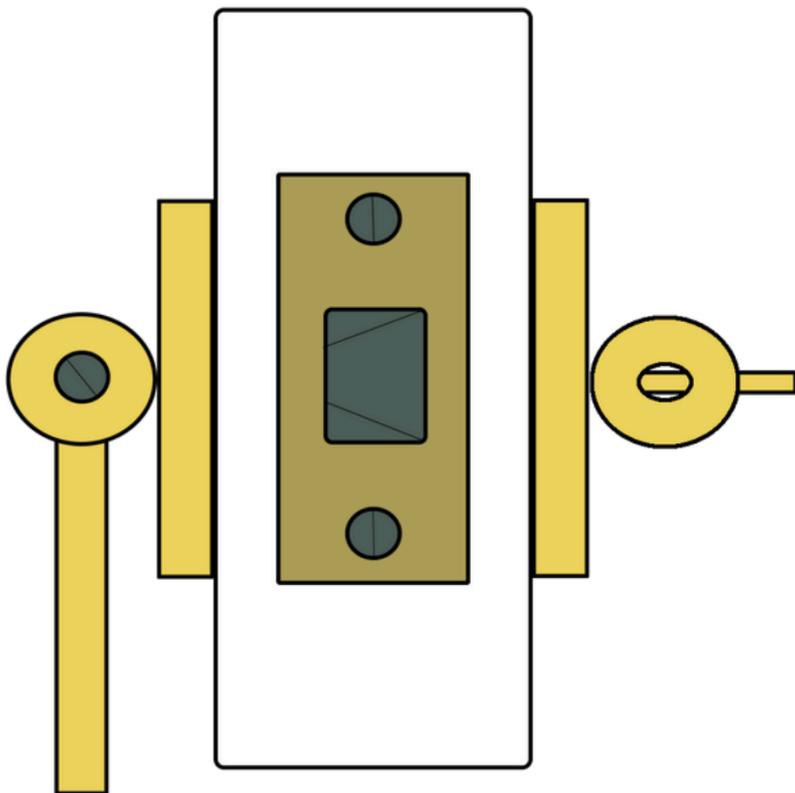


2) Position the fitted handle through the door and push it until it is securely engaged. Then, attach the opposite backplate and knuckle onto the side of the spindle that has been shaved.

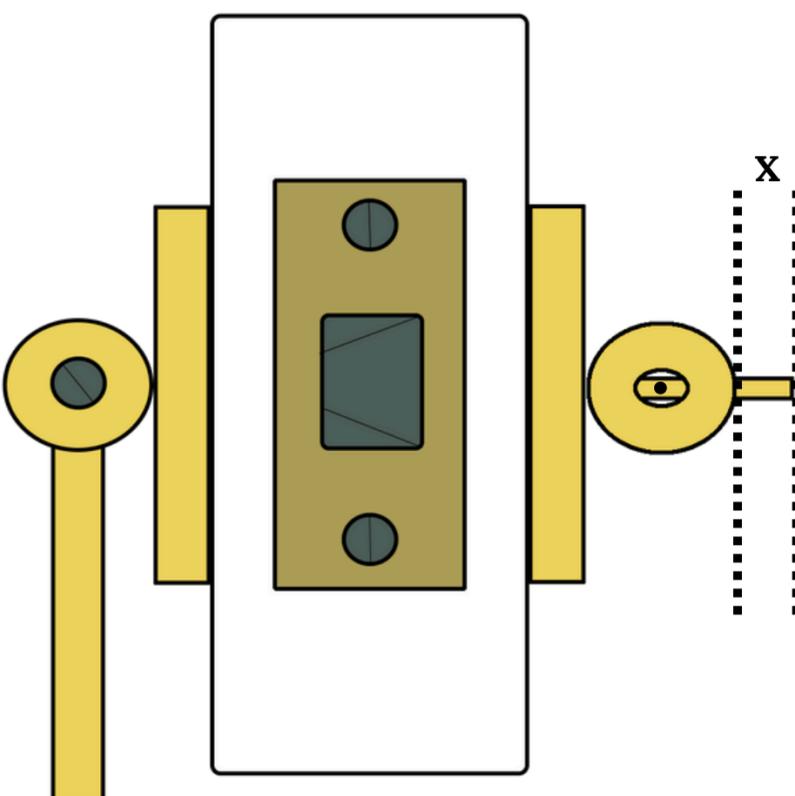


3) Make a mark on the spindle through the hole of the knuckle fixing. Additionally, mark the top of the knuckle on the spindle "X" to indicate any extra length.



## Recommended Drop Handle Fitting Guide

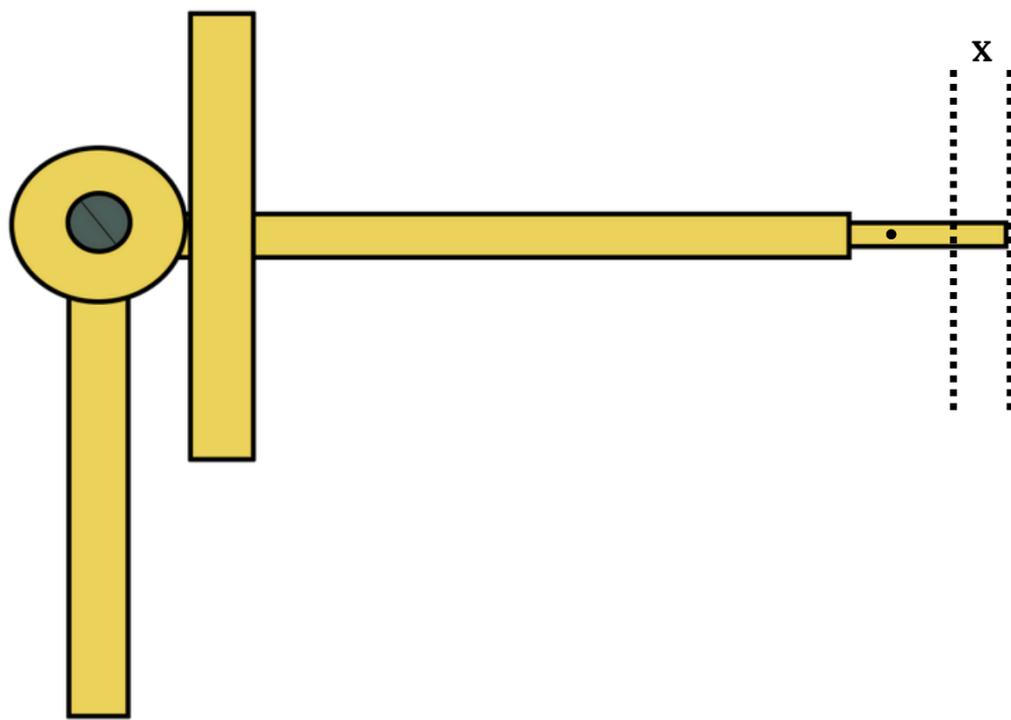

- 4) Take off the fitted handle and spindle from the door, then drill a 4mm hole where you previously marked for your fixing screw. Cut off any excess spindle length marked as “X”. We suggest filing the end of the spindle to achieve a flush, clean finish, ensuring it sits perfectly with the knuckle end once attached.

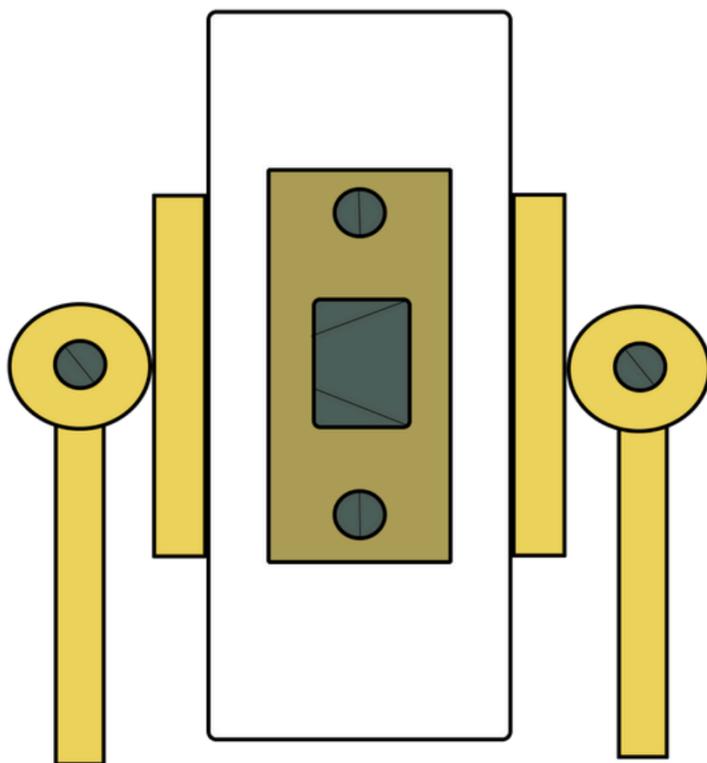

- 5) Reinsert the attached handle and spindle through the door, then position the second backplate, drop handle and knuckle back on, making sure both handles are fully engaged and secure with the fixing screw.

Both drop handles should move freely when lifted, showing no resistance or stiffness.

Please note that this is only a recommended guide to fitting, Optimum Brasses always advises our hardware is fitted by a professional.

